




## POWER & EFFICIENCY

|                            |   |  |                           |
|----------------------------|---|--|---------------------------|
| INPUT POWER OPTIONS        | AC 1PH 200-240V 50/60Hz   AC 3PH 200-240V 50/60Hz   AC 3PH 380-480V 50/60Hz |  |                           |
| CURRENT AT MAX SPEED (Amp) | 6.3 - 5.6 A   |  | 2.6 - 2.1 A   2.3 - 1.8 A |
| POWER (hp)                 | 5/8 HP BLDC Motor   |  |                           |
| MAXIMUM SPEED (RPM)        | 61 RPM  |  |                           |
| MAX AFFECTED AREA          | 120 ft Dia   14,400 sqft  |  |                           |

## DIMENSIONS & WEIGHT

|              |                 |
|--------------|-----------------|
| FAN DIAMETER | 24 ft           |
| FAN WEIGHT   | 159 lbs (72 kg) |

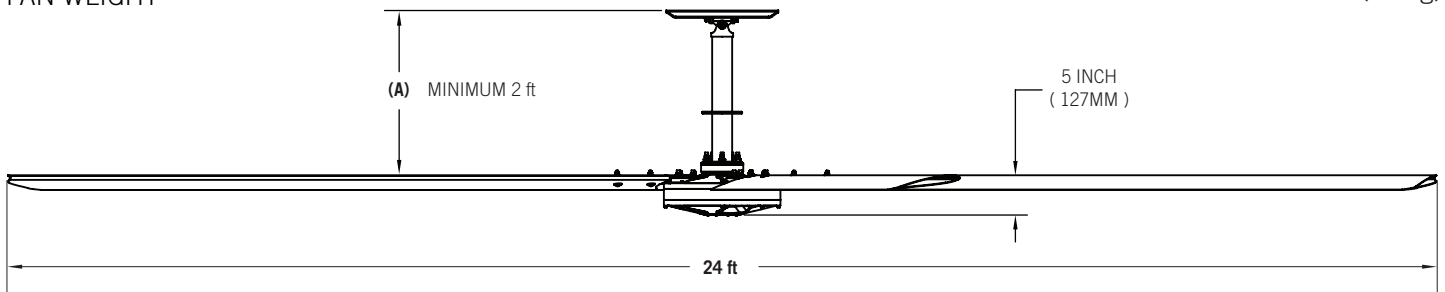

Pictured with 2 ft downrod

## MOUNTING & SAFETY

|                  |   |
|------------------|---|
| MOUNTING OPTIONS | I-beam   Glulam   |
| DOWNROD (A)      | Downrods available in 1 ft increments: 2 ft min., 10 ft max.<br><b>Downrod length must be specified at time of order.</b> |
| SAFETY FEATURES  | Fan Retention System   Airfoil Retention System   Fire Relay  |

## IN THE BOX

|          |   |
|----------|---|
| INCLUDED | Fan I-beam mount with pre-wired downrod   Control panel   Install manual<br>Mounting hardware kit   Communication Kit   Guy wire kit  |
| OPTIONAL | Additional cable lengths   Glulam brackets   BMS Integration<br>350, 500, 700E Series Controller   Environmental Control   Fire Relay |

## WARRANTY & CERTIFICATIONS

|                       |   |
|-----------------------|---|
| CERTIFICATIONS        | ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America   "AMCA" Certified |
| WARRANTY <sup>1</sup> | Limited Lifetime Warranty   |

<sup>1</sup>See complete warranty for details.

